

CRINT-C128R/DC110-125V

1 pole | Normally open solid state AC



Main circuit	
Output type	TRIAC
Type	Synchronized zero
Output voltage range	48 ... 280 V AC
Recommended minimum contact load	100 mA
Residual current	1.5 mA
Maximum voltage drop	1.2 V AC
Rated current	2 A
Inrush current	80 A, 10 ms
Rated load AC	fig. 2.

Control circuit	
Nominal voltage	see table product references
Operating voltage range	0.8 ... 1.2 U _N
Pick-up voltage	≤ 0.8 U _N
Release voltage	≤ 0.25 U _N
Power consumption DC	150 mW

Insulation	
Test voltage open contact	1 kV / 1 min
Test voltage contact / coil	2.5 kV / 1 min
Overvoltage category	III
Pollution degree	3

General data	
Storage temperature (no ice)	-30 ... 85 °C
Operation temperature	-30 ... 70 °C
Pick-up time	1/2 Cycle +1 ms
Release time	1/2 Cycle +1 ms
Conductor cross section cage clamp	0.75 ... 2.5 mm ²
Ingress Protection	IP 20
Mounting	TH35 (EN 60715)
Dimensions	fig. 3.
Weight	30 g
Housing material	PA

Product references		
Description	Type	110-125
Cage clamp terminal	CRINT-C128R/DC...V	✓
«...» List control voltage to complete product references		

Accessories	
Potential bridge bar	CRINT-BR20-BU (BAG 5 PCS), CRINT-BR20-RD (BAG 5 PCS), CRINT-BR20-BK (BAG 5 PCS)
Label plate	CRINT-LAB (BAG 4X16 PCS)

Replacement relays		
Description	Type	60
DC	CRINT-R18/DC...V	✓
«...» List control voltage to complete product references		
60 V relay used for all sockets with a minimum nominal voltage higher or equal 60 V		




fig. 1. Wiring diagram

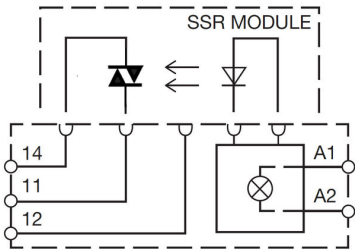


fig. 2. AC derating curve


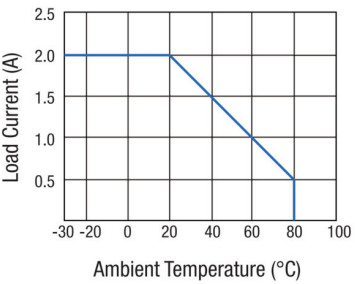


fig. 3. Dimensions (mm)

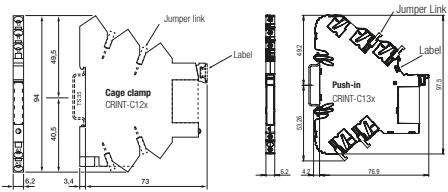

Technical approvals, conformities

Standards EN 62314
Railway EN 50155; EN 45545-2
Approvals