

HDR-15-24, HDR-30-24

Power supply | 24 V DC

Power supply

Nominal voltage	85 ... 264 V AC
Operating voltage range	85 ... 277 V AC
Rated Power	15 W / 30 W
Rated frequency	47 ... 63 Hz
Efficiency	> 86 %
Overload	110 ... 145 %
Overload protection	Hiccup, automatic recovery
Output voltage range	21.6 ... 29 V

Insulation

Overvoltage category	III
Operating altitude	< 2000 m
Isolation impedance	> 100 MΩ
Withstand overvoltage	4 kV AC

General data

Ambient temperature storage (no ice)	-40 ... 85 °C
Ambient temperature operation	-30 ... 70 °C
Conductor cross section	2.5 mm ²
Dimension	fig. 1
Weight	78 g
Protection degree	IP20
Housing material	PA 6

Product reference

Description	Type
Power supply 15 W, 24 V DC	HDR-15-24
Power supply 30 W, 24 V DC	HDR-30-24

Other voltages on request. Please contact support@comatreleco.com.


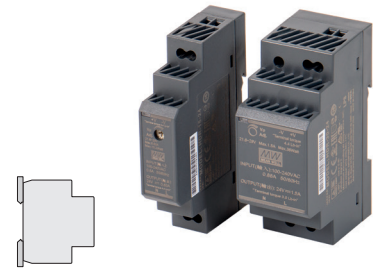


fig. 1. Dimension (mm)

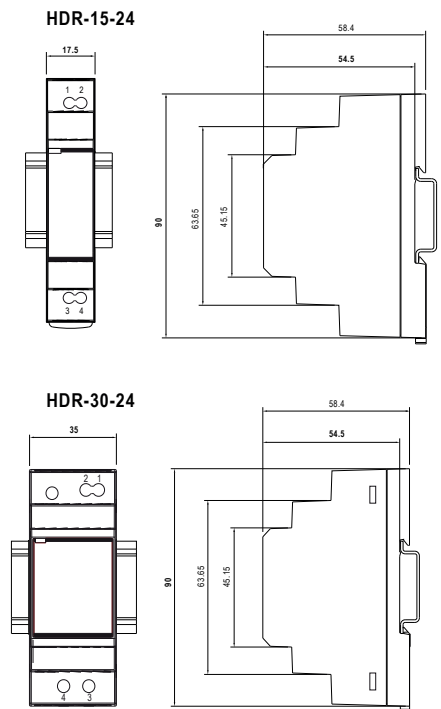

Standards and approvals

Approvals